

# The Telephone Network

An Engineering Approach to Computer Networking


## Is it a computer network?

- Specialized to carry voice
- Also carries
  - ◆ telemetry
  - ◆ video
  - ◆ fax
  - ◆ modem calls
- Internally, uses digital *samples*
- Switches and switch controllers are special purpose computers
- Principles in its design apply to more general computer networks

# Concepts

- Single basic service: two-way voice
  - ◆ low end-to-end delay
  - ◆ guarantee that an accepted call will run to completion
- Endpoints connected by a *circuit*
  - ◆ like an electrical circuit
  - ◆ signals flow both ways (*full duplex*)
  - ◆ associated with bandwidth and buffer *resources*

# The big picture

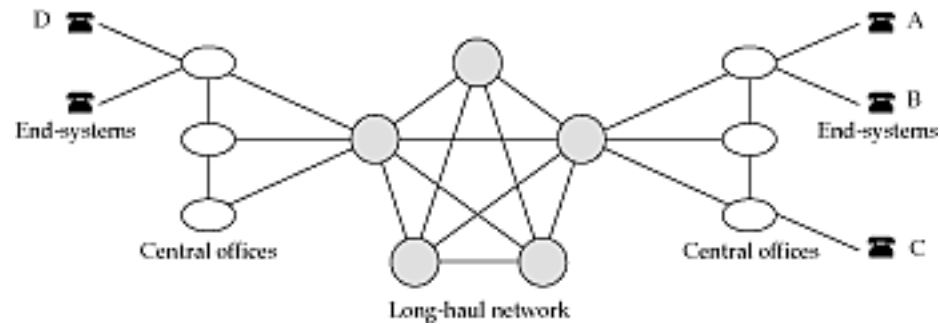



- Fully connected core
  - ◆ simple routing
  - ◆ telephone number is a hint about how to route a call
    - ◆ but not for 800/888/700/900 numbers
  - ◆ hierarchically allocated telephone number space

# The pieces

1. End systems
2. Transmission
3. Switching
4. Signaling

# 1. End-systems

- Transducers
  - ◆ key to carrying voice on wires
- Dialer
- Ringer
- Switchhook

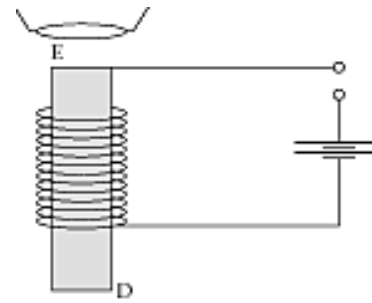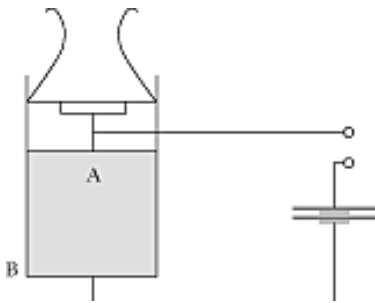

## Sidetone

- Transmission circuit needs two wires
- And so does reception circuit
- => 4 wires from every central office to home
- Can we do better?
- Use *same* pair of wires for both transmission and reception
- Cancel out what is being said
- Ergonomics: leave in a little
  - ◆ *sidetone*
  - ◆ unavoidable

# Echo

- Shared wires => received signal is also transmitted
- And not completely cancelled out!
- Leads to echo (why?)
- OK for short-distance calls
- For long distance calls, need to put in echo cancellors (why?)
- Expensive
- Lesson
  - ◆ keep end-to-end delays as short as possible



# Dialing

## ■ Pulse

- ◆ sends a pulse per digit
- ◆ collected by central office

## ■ Tone

- ◆ key press (feep) sends a pair of tones = digit
- ◆ also called Dual Tone Multifrequency (DTMF)

## 2. Transmission

### ■ Link characteristics

- ◆ information carrying capacity (bandwidth)
  - ◆ information sent as *symbols*
  - ◆ 1 symbol  $\geq$  1 bit
- ◆ propagation delay
  - ◆ time for electromagnetic signal to reach other end
  - ◆ light travels at  $0.7c$  in fiber  $\sim 8$  microseconds/mile
  - ◆ NY to SF  $\Rightarrow$  20 ms; NY to London  $\Rightarrow$  27 ms
- ◆ attenuation
  - ◆ degradation in signal quality with distance
  - ◆ long lines need regenerators
  - ◆ optical amplifiers are here

# Transmission: Multiplexing

- *Trunks* between central offices carry hundreds of conversations
- Can't run thick bundles!
- Instead, send many calls on the same wire
  - ◆ *multiplexing*
- Analog multiplexing
  - ◆ bandlimit call to 3.4 KHz and frequency shift onto higher bandwidth trunk
  - ◆ obsolete
- Digital multiplexing
  - ◆ first convert voice to *samples*
  - ◆ 1 sample = 8 bits of voice
  - ◆ 8000 samples/sec => call = 64 Kbps

# Transmission: Digital multiplexing

- How to choose a sample?
  - ◆ 256 *quantization levels*
    - ◆ logarithmically spaced (why?)
    - ◆ sample value = amplitude of nearest quantization level
  - ◆ two choices of levels (mu law and A law)
- Time division multiplexing
  - ◆ trunk carries bits at a faster bit rate than inputs
  - ◆  $n$  input streams, each with a 1-byte buffer
  - ◆ output interleaves samples
  - ◆ need to serve all inputs in the time it takes one sample to arrive
  - ◆ => output runs  $n$  times faster than input
  - ◆ *overhead* bits mark end of *frame* (why?)

## Transmission: Multiplexing

- Multiplexed trunks can be multiplexed further
- Need a standard! (why?)
- US/Japan standard is called *Digital Signaling* hierarchy (DS)

Digital Signal Number	Number of previous level circuits	Number of voice circuits	Bandwidth
DS0		1	64 Kbps
DS1	24	24	1.544Mbps
DS2	4	96	6.312 Mbps
DS3	7	672	44.736 Mbps

# Transmission: Link technologies


- Many in use today
  - ◆ twisted pair
  - ◆ coax cable
  - ◆ terrestrial microwave
  - ◆ satellite microwave
  - ◆ optical fiber
- Increasing amount of bandwidth and cost per foot
- Popular
  - ◆ fiber
  - ◆ satellite

## The cost of a link

- Should you use the cheapest possible link?
- No!
- Cost is in installation, not in link itself
- Builders routinely install twisted pair (CAT 5), fiber, and coax to every room
- Even if only one of them used, still saves money
- Long distance
  - ◆ overprovision by up to ten times

# Transmission: fiber optic links

- Wonderful stuff!
  - ◆ lots of capacity
  - ◆ nearly error free
  - ◆ very little attenuation
  - ◆ hard to tap
- A long thin strand of very pure glass

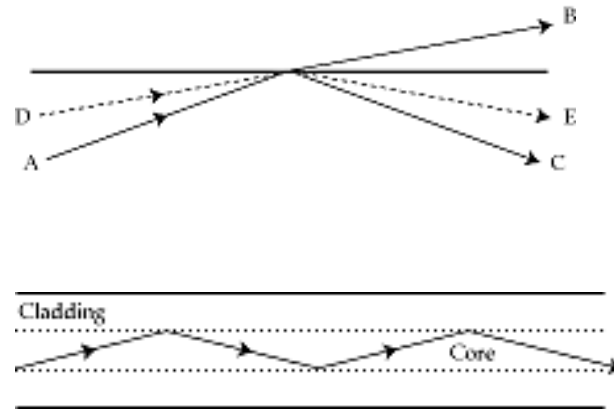



## More on fibers

- Three types

- ◆ step index (multimode)
- ◆ graded index (multimode)
- ◆ single mode

- Multimode

- ◆ cheap
- ◆ use LEDs
- ◆ short distances (up to a few kilometers)

- Single mode


- ◆ expensive
- ◆ use lasers
- ◆ long distances (up to hundreds of kilometers)

# Transmission: satellites

- Long distances at high bandwidth
- Geosynchronous
  - ◆ 36,000 km in the sky
  - ◆ up-down propagation delay of 250 ms
  - ◆ bad for interactive communication
  - ◆ slots in space limited
- Nongeosynchronous (Low Earth Orbit)
  - ◆ appear to move in the sky
  - ◆ need more of them
  - ◆ handoff is complicated
  - ◆ e.g. Iridium


## 3. Switching

- Problem:
  - ◆ each user can potentially call any other user
  - ◆ can't have direct lines!
- Switches establish temporary *circuits*
- Switching systems come in two parts: switch and switch controller

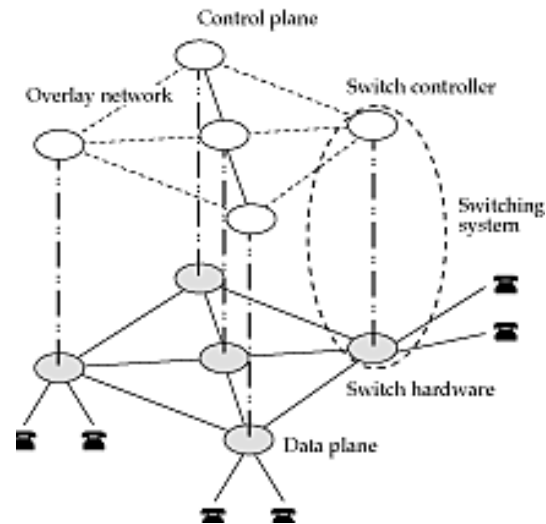


# Switching: what does a switch do?

- Transfers data from an input to an output
  - ◆ many ports (up to 200,000 simultaneous calls)
  - ◆ need high speeds
- Some ways to switch:
  - ◆ *space division*
  - ◆ if inputs are multiplexed, need a *schedule* (why?)

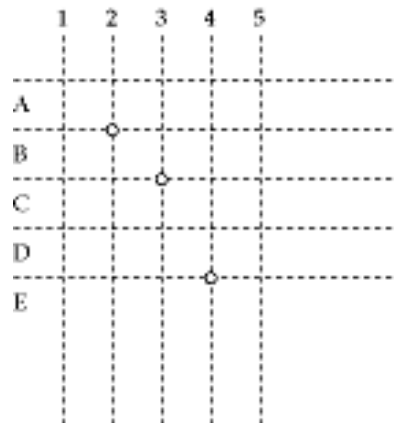

# Switching

- Another way to switch
  - ◆ *time division (time slot interchange or TSI)*
  - ◆ also needs a schedule (why?)

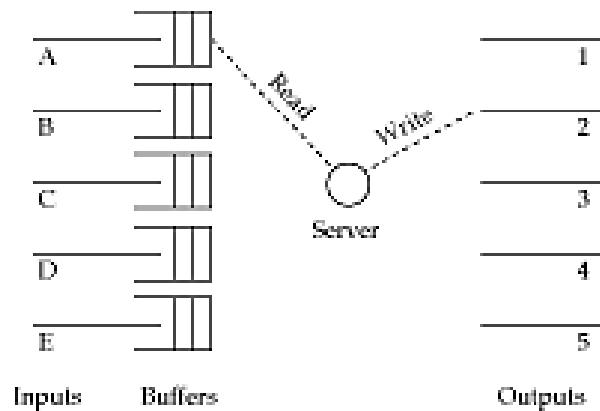


- To build larger switches we combine space and time division switching elements

## 4. Signaling

- Recall that a switching system has a switch and a switch controller
- Switch controller is in the *control* plane
  - ◆ does not touch voice samples
- Manages the network
  - ◆ call routing (collect *dialstring* and forward call)
  - ◆ alarms (ring bell at receiver)
  - ◆ billing
  - ◆ directory lookup (for 800/888 calls)


# Signaling network

- Switch controllers are special purpose computers
- Linked by their own internal computer network
  - ◆ *Common Channel Interoffice Signaling (CCIS) network*
- Earlier design used *in-band* tones, but was severely hacked
- Also was very rigid (why?)
- Messages on CCIS conform to *Signaling System 7 (SS7) spec.*

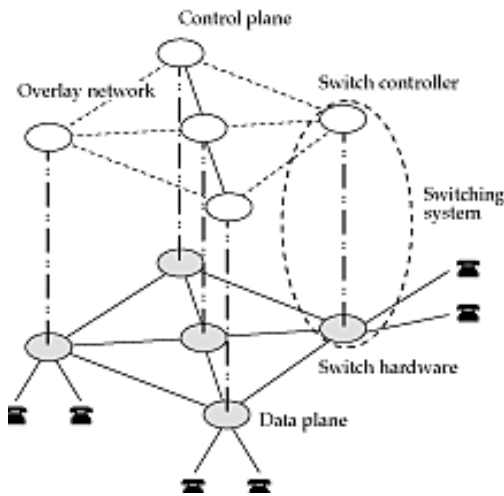

# Signaling


- One of the main jobs of switch controller: keep track of *state* of every endpoint
- Key is *state transition diagram*

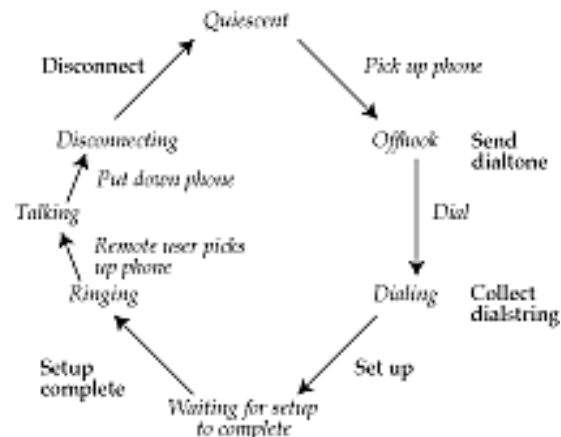



# Cellular communication

- Mobile phone talks to a *base station* on a particular radio frequency
- Aren't enough frequencies to give each mobile a permanent frequency (like a wire)
- *Reuse*
  - ◆ temporal
    - ◆ if mobile is off, no frequency assigned to it
  - ◆ spatial
    - ◆ mobiles in non-adjacent *cells* can use the same frequency

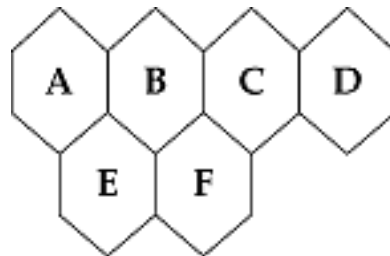

# Problems with cellular communication

- How to complete a call to a mobile?
  - ◆ need to *track* a mobile
  - ◆ on power on, mobile tells base of its ID and home
  - ◆ calls to home are forwarded to mobile over CCIS
- How to deal with a moving cell phone?
  - ◆ nearest base station changes
  - ◆ need to *hand off* existing call to new base station
  - ◆ a choice of several complicated protocols

# Challenges for the telephone network

## ■ Multimedia

- ◆ simultaneously transmit voice/data/video over the network
- ◆ people seem to want it
- ◆ existing network can't handle it
  - ◆ bandwidth requirements
  - ◆ *burstiness* in traffic (TSl can't skip input)
  - ◆ change in statistical behavior

## ■ Backward compatibility of new services

- ◆ huge existing infrastructure
- ◆ idiosyncrasies

## ■ Regulation

- ◆ stifles innovation

# Challenges

## ■ Competition

- ◆ future telephone networks will no longer be monopolies
- ◆ how to manage the transition?

## ■ Inefficiencies in the system

- ◆ an accumulation of cruft
- ◆ special-purpose systems of the past
- ◆ 'legacy' systems
- ◆ need to change them without breaking the network