Protocol Implementation

An Engineering Approach to Computer Networking

Protocol implementation

- Depends on *structure* and *environment*
- Structure
  - *partitioning* of functionality between user and kernel
  - separation of layer processing (*interface*)
- Environment
  - data copy cost
  - interrupt overhead
  - context switch time
  - latency in accessing memory
  - cache effects

Partitioning strategies

- How much to put in user space, and how much in kernel space?
  - tradeoff between
    - software engineering
    - customizability
    - security
    - performance
- Monolithic in kernel space
- Monolithic in user space
- Per-process in user space

Interface strategies

- Single-context
- Tasks
- Upcalls

Monolithic in kernel

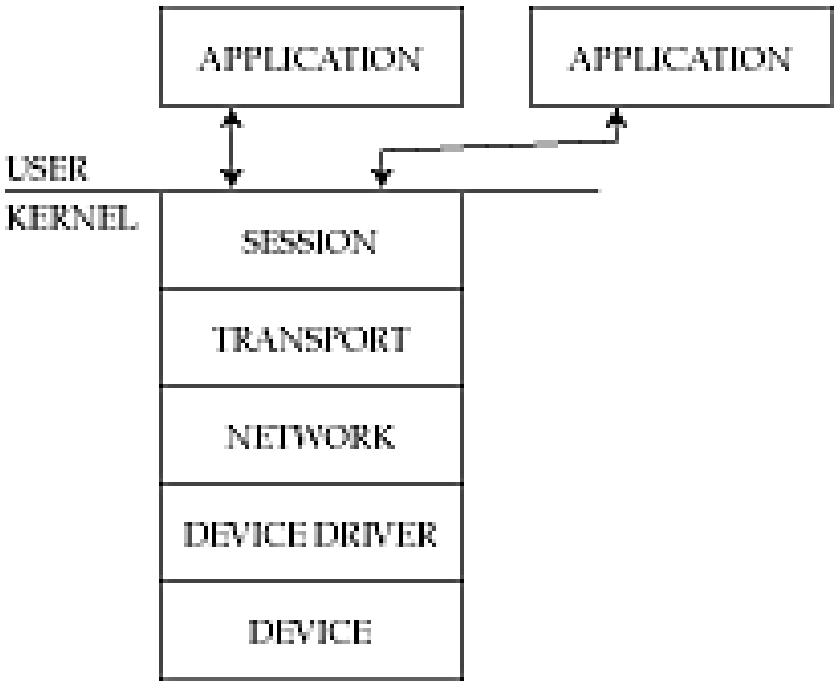

Monolithic in user space

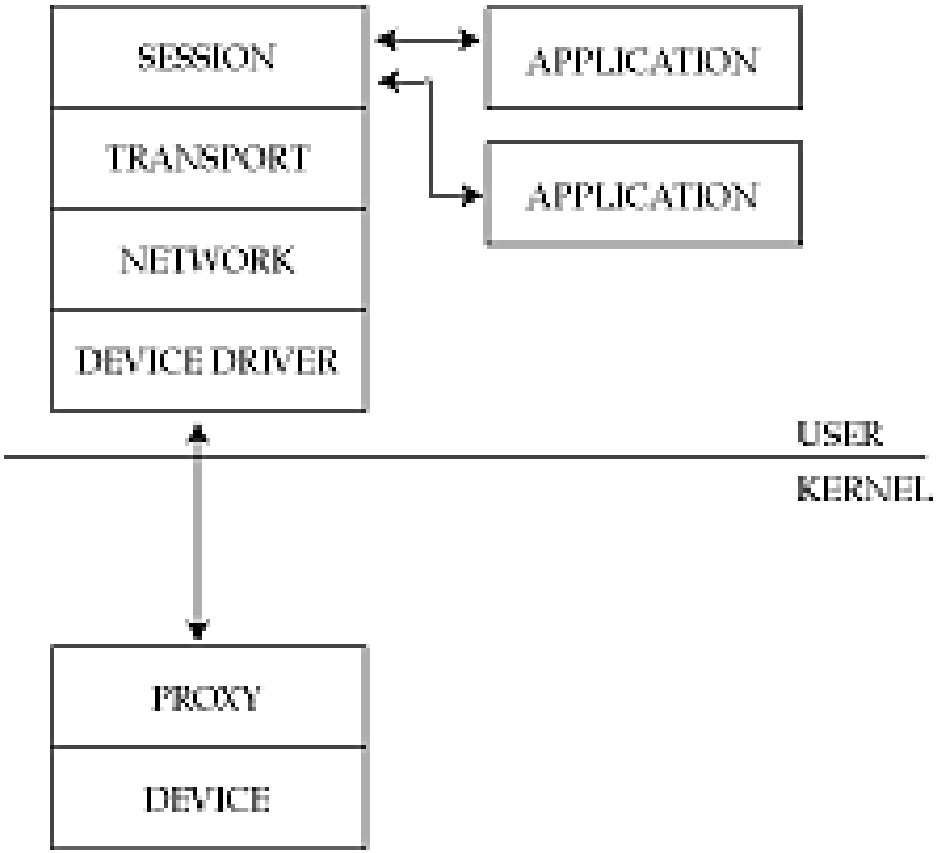

Per-process in user space

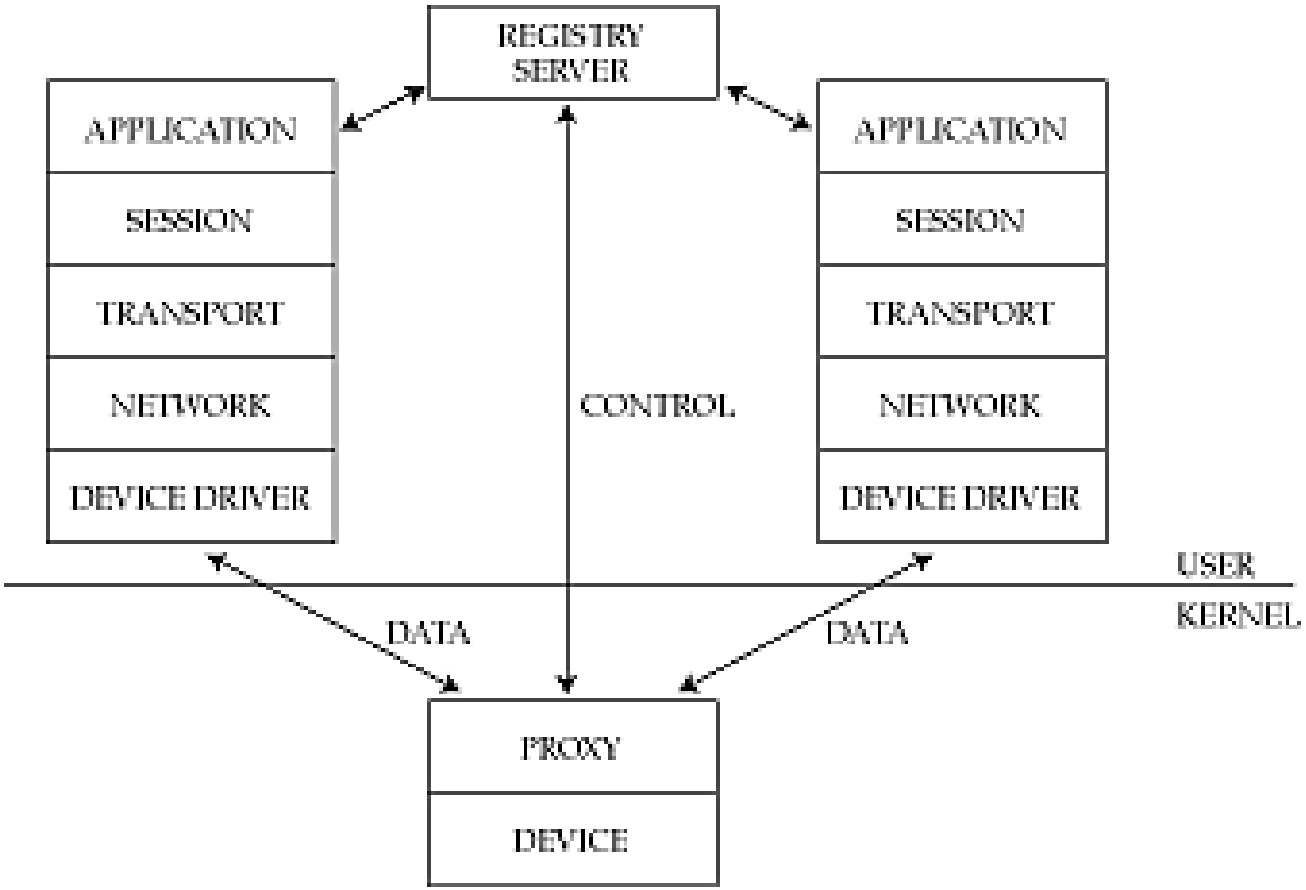

Interfaces

- Single-context
- Tasks
- Upcalls

Single context

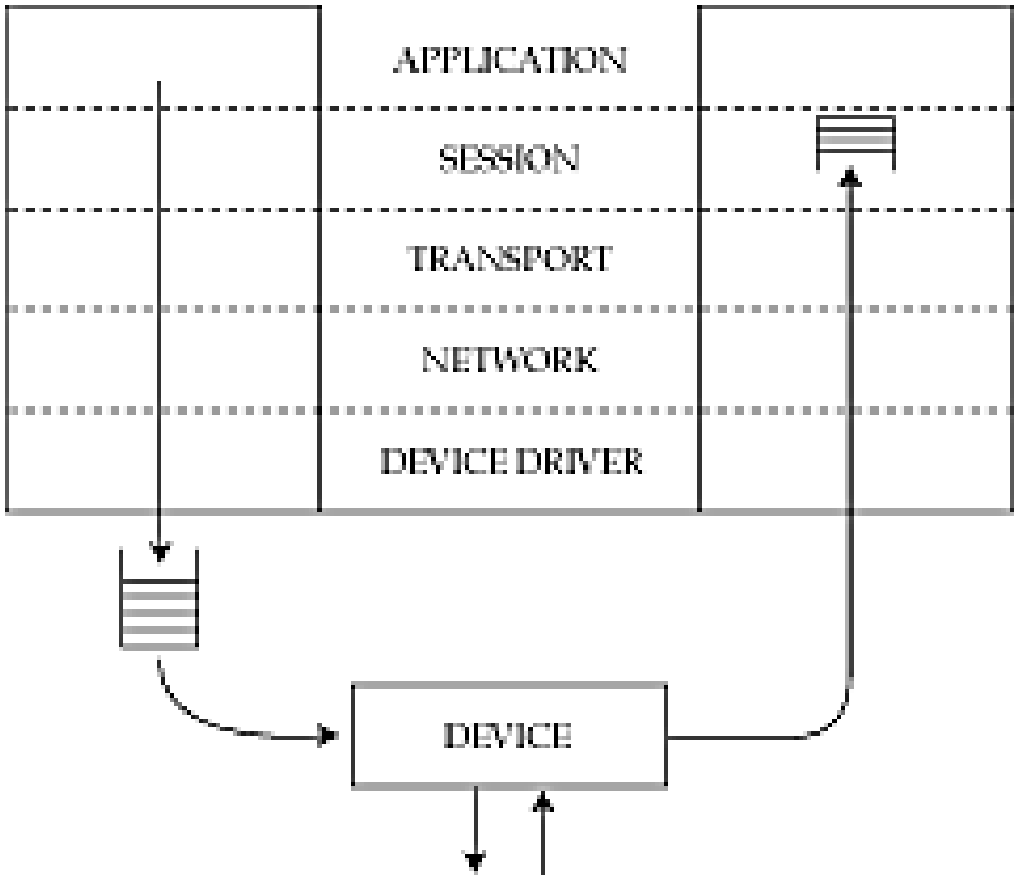

Tasks

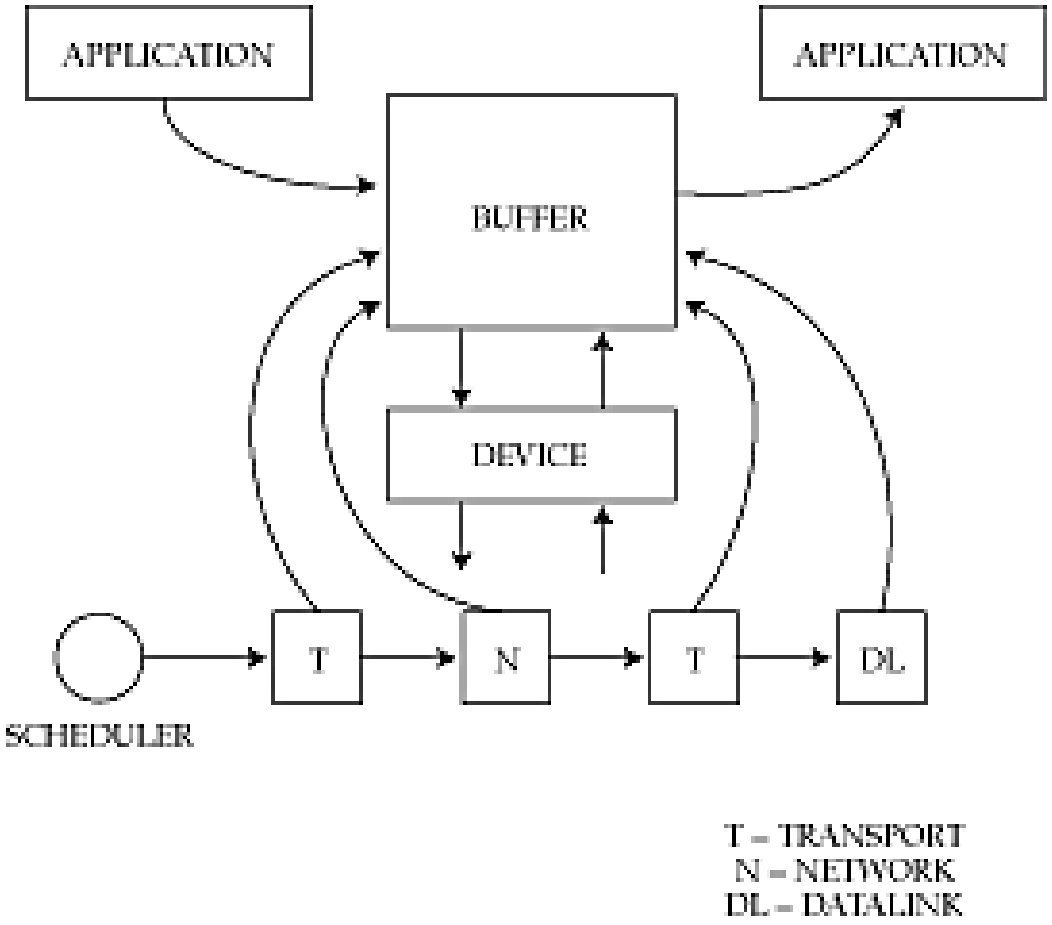
APPLICATION
APPLICATION
BUFFER
DEVICE
T
N
T
DL
SCHEDULER
T – TRANSPORT
N – NETWORK
DL – DATALINK

Upcalls

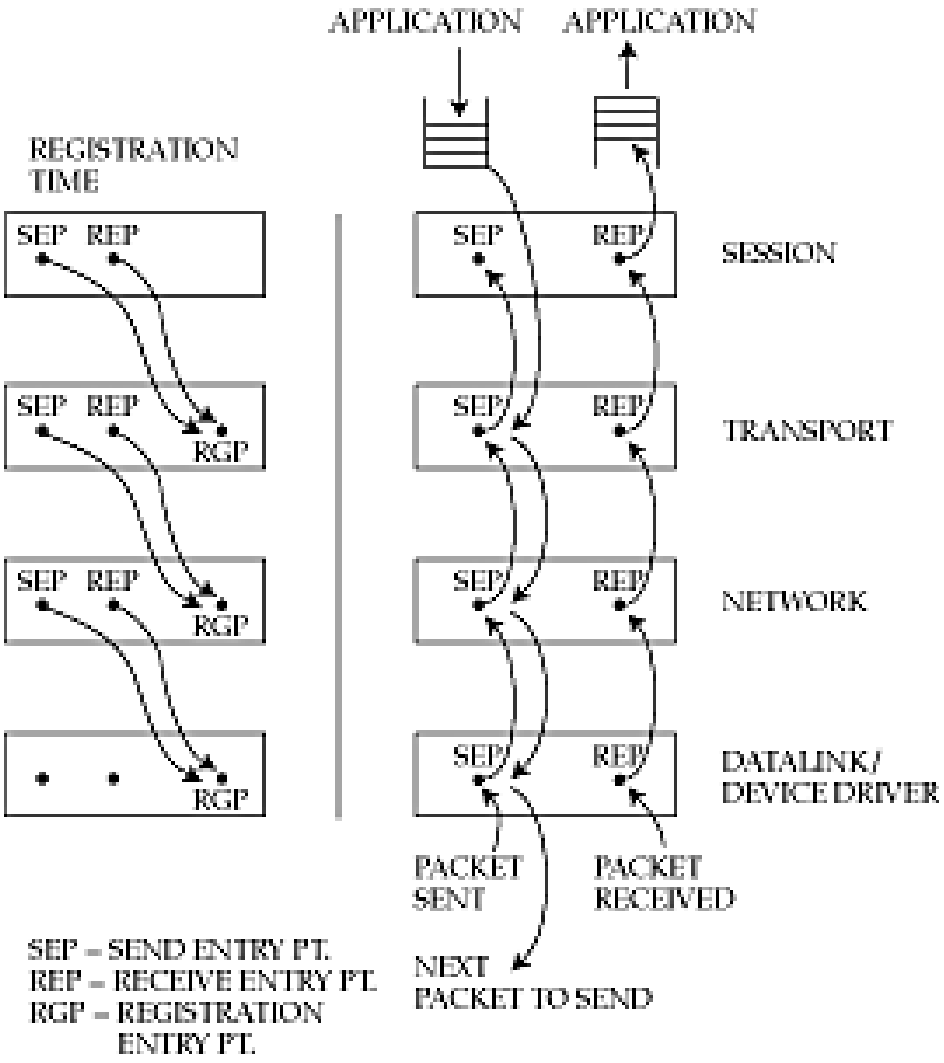
APPLICATION
APPLICATION
REGISTRATION TIME
SEP
REP
RGP
SESSION
TRANSPORT
NETWORK
DATALINK/ DEVICE DRIVER
PACKET SENT
PACKET RECEIVED
NEXT PACKET TO SEND
SEP – SEND ENTRY PT.
REP – RECEIVE ENTRY PT.
RGP – REGISTRATION ENTRY PT.

Protocol implementation

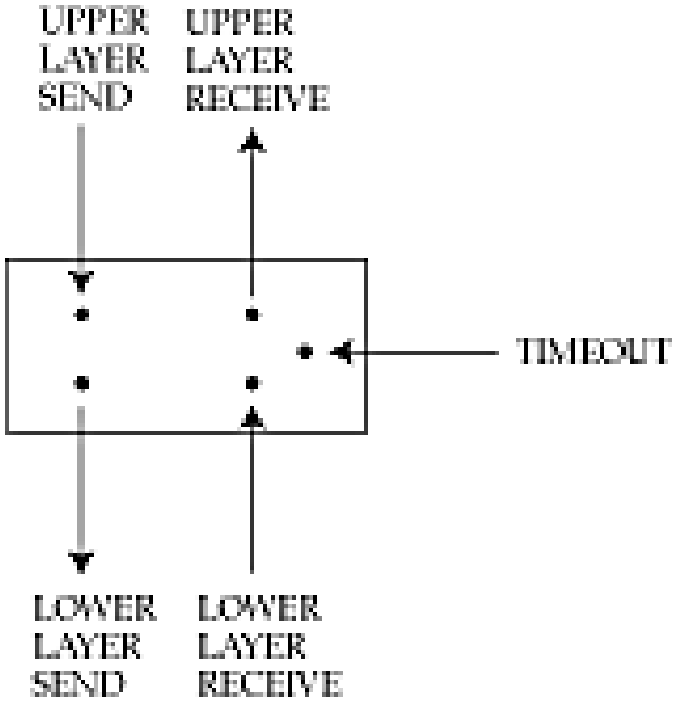

Some numbers

- 10 Kbps 400 ms
- 100 Kbps, 40 ms
- 1 Mbps, 4 ms
- 100 Mbps, 40 µs
- User-to-kernel context switch ~40 µs
- Copying the packet ~25 µs
- Checksum in software ~40 µs
- Scheduling delays ~150 µs (depends on workload)
- Interrupt handling ~10-50 µs (depends on the bus)
- Protocol processing ~15 -100 µs (depends on protocol complexity)

Rules of thumb

- Optimize common case
- Watch out for bottlenecks
- Fine tune inner loops
- Choose good data structures
- Beware of data touching
- Minimize # packets sent
- Send largest packets possible
- Cache hints
- Use hardware
- Exploit application properties